

Thermoquiet is easy to install, with integrated lip and tape for quick vapor-tight lap joint and can be glued on one and two sides or floated.

Amvic Thermoquiet meets code requirements for residential and high rise applications. The cushion layer improves sound and thermal insulation properties while reducing standing fatigue while the reinforced reflective FOIL middle layer reflects heat back into the room in winter. The Low Volatile Organic Compounds V.O.C. prevent any off gassing.

Cushion layer with fire retardant additive; for high rise and commercial applications

Integrated reflective Radiant / vapor barrier

Wear and acoustic Layer (faces floor)

Additional h.D poly layer with integral self-adhesive tape lip (speeds installs)

IDEAL FOR USE UNDER:
LAMINATE, ENGINEERED OR HARDWOOD, CARPET OR CERAMIC TILE FLOOR

5 in 1 Underlay Solution

- 1** Certified Vapor barrier
- 2** Certified Thermal barrier
- 3** Certified acoustic Barrier
- 4** Dual density foam for superior cushioning and Wear Resistance
- 5** Certified fire retardant (ASTM E84 / GB 8410 – 2006)

Roll Specs:

9/64in x 48in x 25ft - (100 Sq ft)
3.5mm x 1.22m x 7.62m - (9.3 m²)


Caution:

This product must NOT be used ABOVE radiant floor heating.

THERMOQUIET® HIGH PERFORMANCE UNDERLAY



IMPROVE YOUR LIVING ENVIRONMENT
REDUCE YOUR HEATING COST

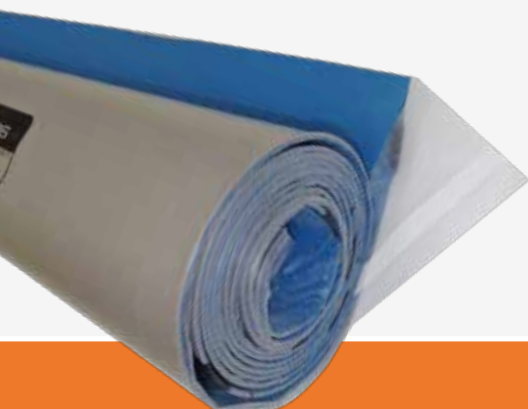

FOR MORE INFORMATION VISIT:
AMVIC.COM